

Solvision FS Series Wall Mount Speaker

FS-Q4, Q5, Q6

High-end Wall Mounted Speaker

The Solvision Wall mount FS Series universal surface speakers are compact systems with rugged HIPS housing to ensure its durability and sound quality. This series of speakers rated to IP55. Designed for widely-using.

Water and dust protected IP55



Features

The FS-Q5 universal surface speakers are compact systems with rugged HIPS housing to ensure its durability and sound quality.

This series of speakers rated to IP55. Designed for widely-using in outdoor applications which need good sound quality: like commercial pedestrian street, pub street, villa, swimming pool, golf course, and playground. It can also have extraordinary performance in use of indoor: conference room, boardroom, and multi-functional room.


They are suitable for outdoor applications also indoor applications are good as well.

Matching transformer with multi taps selections for 100/70V/8Ω input, offers versatility, and it is capable for profession audio and public address applications.

We offer black and white alternative color or other spraying colors which are concerted to decoration, and it is fit for different environment.

Humanizing design mounting bracket makes installation easy and fast, saving installation cost and time. You can also change the speaker's any angle in order to control sound directivity.

Installation method

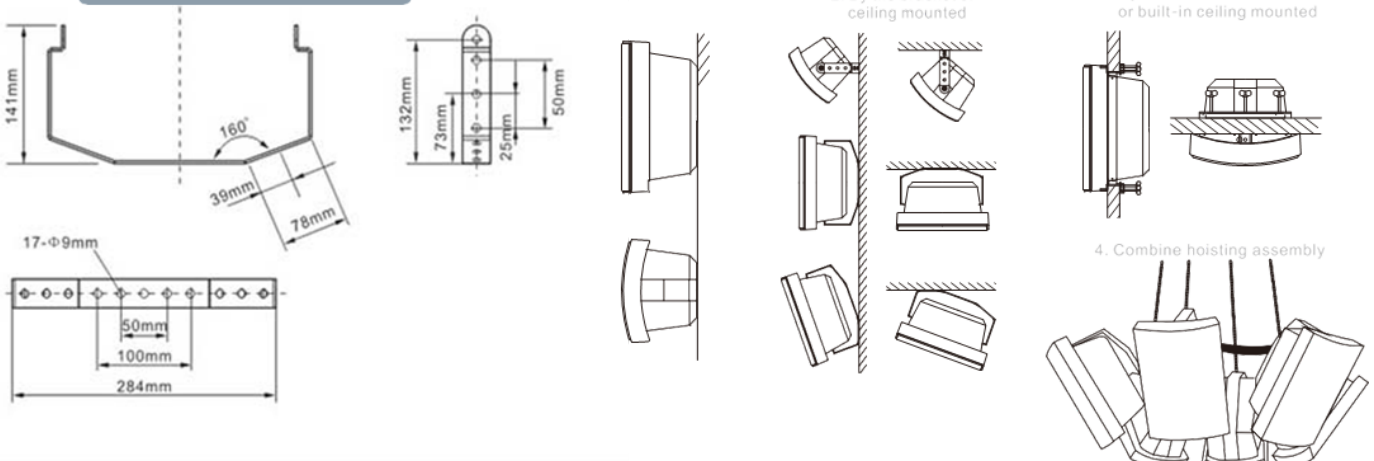

SOLVISION TECHNOLOGY

27 Elder Road, Working
Surrey GU24 9HB UK
info@solvisionav.com

9 A, Blackwood Avenue,
Mentone, VIC- 3194
salesaustralia@solvisionav.com

629 Redstone Drive NE, Calgary
AB, T3N, 1KB Alberta
salescanada@solvisionav.com

SOLVISION INDIA

D-9th Floor SAS Tower-B
Sector -38 Gurugram Haryana- 122001
salesindia@solvisionav.com

Solvision FS Series Wall Mount Speaker

FS-Q4, Q5, Q6

High-end Wall Mounted Speaker

Specifications

Model No.	FS-Q4 B/W
Rated Input	20W@100/70V ; 40W@8Ω
Max Input	30W@100/70V; 80W@8Ω
High Impedance	83Ω, 167Ω, 333Ω, 667Ω, 1.33kΩ,
Power Taps	100V: 20W, 10W, 5W, 2.5W; 70V: 10W, 5W, 2.5W,1.25W
SPL (1W / 1m)	88dB
MAX SPL(Rated / 1m)	108dB@100/70V; 110dB@8Ω
Frequency Response(-10dB)	90Hz~20kHz
Dispersion (4kHz / 1kHz)	90° / 190°
Power Selecting Way	Rotating Selection Switch
Material	Housing: HIPS; Grille: Steel
Color	FS-Q4B: Black; FS-Q4W: White
Temperature / Humidity	-30°C ~ 60°C; <95%
Water Protection	IEC529 IP55
Speaker Component	4" Woofer + 1" Tweeter
Dimensions	129 (W) x 238(H) x 158(D)
Weight	2.9kg
Mounting	U Type Mounting Bracket Or Optional Other Bracket
Shipping Weight	12.2 kg, 4 pcs
Shipping Dimensions	0.0686CBM, 48*42*34 cm, 4 pcs

SOLVISION TECHNOLOGY

27 Elder Road, Working
Surrey GU24 9HB UK
info@solvisionav.com

9 A, Blackwood Avenue,
Mentone, VIC- 3194
salesaustralia@solvisionav.com

629 Redstone Drive NE, Calgary
AB, T3N, 1KB Alberta
salescanada@solvisionav.com

SOLVISION INDIA

D-9th Floor SAS Tower-B
Sector -38 Gurugram Haryana- 122001
salesindia@solvisionav.com

Solvision FS Series Wall Mount Speaker

FS-Q4, Q5, Q6

High-end Wall Mounted Speaker

Specifications

Model No.	FS-Q5 B/W
Rated Input	40W@100V; 80W@8Ω
Max Input	60W@100V; 160W@8Ω
High Impedance	125Ω, 250Ω, 500Ω, 1kΩ, 2kΩ
Power Taps	100V: 40W, 20W, 10W, 5W; 70V: 40W, 20W, 10W, 5W, 2.5W
SPL (1W /1m)	90dB
MAX SPL (Rated /1m)	106dB@100/70V; 109dB@8Ω
Frequency Response(-10dB)	70Hz~20kHz
Crossover Slope	12dB / Octave
Dispersion (4kHz / 1kHz)	125° / 190°
Power Selecting Way	Rotating Selection Switch
Material	Housing: HIPS; Grille: Steel
Color	FS-Q5B: Black; FS-Q5W: White
Temperature / Humidity	-30°C~60°C; <95%
Water Protection	IEC529 IP55
Speaker Component	5" Woofer +1" Tweeter
Dimensions	196(W) x 295(H) x 157(D)
Weight	3.6kg
Mounting	U Type Mounting Bracket Or Optional Other Bracket
Shipping Weight	17kg, 4pcs
Shipping Dimensions	0.0718CBM, 50 x 41 x 35cm, 4pcs

SOLVISION TECHNOLOGY

27 Elder Road, Working
Surrey GU24 9HB UK
info@solvisionav.com

9 A, Blackwood Avenue,
Mentone, VIC- 3194
salesaustralia@solvisionav.com

629 Redstone Drive NE, Calgary
AB, T3N, 1KB Alberta
salescanada@solvisionav.com

SOLVISION INDIA

D-9th Floor SAS Tower-B
Sector -38 Gurugram Haryana- 122001
salesindia@solvisionav.com

Solvision FS Series Wall Mount Speaker

FS-Q4, Q5, Q6

High-end Wall Mounted Speaker

Specifications

Model	FS-Q6 B/W
Rate Power	60W@100V; 90W@8Ω
Max Power	90W@100V; 180W@8Ω
Impedance	83Ω, 167Ω, 333Ω, 667Ω, 1.33kΩ,
Power Select	100V: 60W, 30W, 15W, 7.5W; 70V: 60W, 30W, 15W, 7.5W, 3.75W.
S.P.L(1W / 1m)	90dB
MAX S.P.L(Rated / 1m)	108dB@100/70V; 110dB@8Ω
Frequency Response(-10dB)	70Hz~20kHz
Spread Angle (4kHz / 1kHz)	90° / 190°
Power Select Operate	Rotating Selection Switch
Material	Housing: HIPS; Grille: Steel
Color	FS-Q6B: Black; FS-Q6W: White
Operate Temp/ Humidity	-30°C ~ 60°C; <95%
Dustproof/ Waterproof degree	IEC529 IP55
Speaker Unit	6.5"Woofer + 1"Tweeter
Size	214 (W) x 329(H) x 178(D)
Net Weight	4.8kg
Installation	U Type Mounting Bracket or Optional Other Bracket
Gross Weight	21.4 kg, 4 pcs
Packing Size	0.12CBM, 56*51*42 cm,4 pcs

SOLVISION TECHNOLOGY

27 Elder Road, Working
Surrey GU24 9HB UK
info@solvisionav.com

9 A, Blackwood Avenue,
Mentone, VIC- 3194
salesaustralia@solvisionav.com

629 Redstone Drive NE, Calgary
AB, T3N, 1KB Alberta
salescanada@solvisionav.com

SOLVISION INDIA

D-9th Floor SAS Tower-B
Sector -38 Gurugram Haryana- 122001
salesindia@solvisionav.com