


HDMI 2.0 KVM Switch 4 in 2 out SVKVM 422 4K

4K/60 UHD (4:4:4) | HDCP 2.2 Compatible

There are a lot of computer users out there who have multiple computers that they regularly use. This can include a desktop and laptop or even Windows and Mac computers. Thankfully, even with four different computers, you can use the same set of peripherals by easily switching between them. To make the same possible, you will need to use one of the best KVM switches Solvision - SVKVM 422 4K

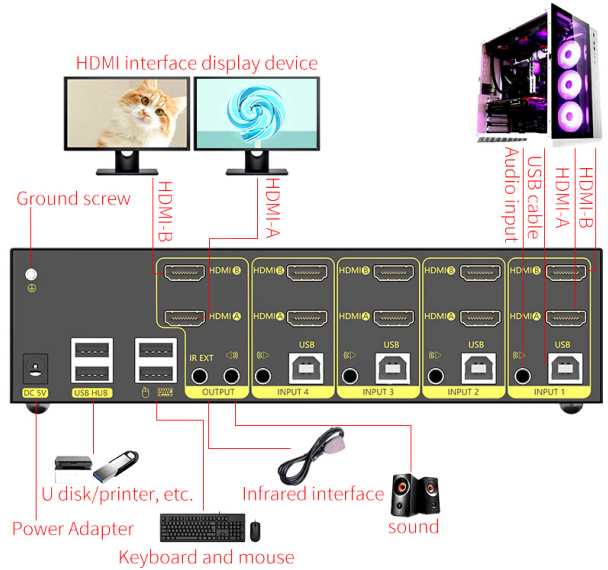

Features

- Desktop HDMI KVM switch- 4 in 2 out, can realize the simultaneous display of the main screen and the secondary screen of the computer host.
- Works with up to 4 computers at once
- 4K60 UHD Resolution - Supports resolutions up to 3840×2160 @60Hz (4:4:4) resolution,
- Key switch - Manually press the panel. The button above can switch to the corresponding input (computer) host. Auto switching, Remote control.
- Work Freely Without Compromising Security - Display and control classified and non-classified inputs without compromising security.
- Display - Provides flexible presentation options with 4K HD quality.
- Smooth Switching Between Computers (Virtual Display Technology), Smart auto EDID management.
- Versatile and Flexible - Configurable as a HDMI switch (default) & switch for sharing to a display with Audio Extractor
- Multi-system compatibility - Compatible with windows series, Mac, Linux and other system No need to install drivers plug and play.
- Smart KVM status could be memorized after power down, automatically restoring previous status after next power on.
- HDMI Audio Formats: DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby-AC3/DSD
- Color Depth: 8-bit, 10-bit, 12-bit, Color Space: RGB, YCbCr 4:4:4
- Dual Display - Provides flexible presentation options with duplicate or extended view modes.

4K

HD quality

Four in two out

compatible

Plug and play

Specifications

Video Inputs	(8) HDMI; supports HDMI/HDCP
Video Outputs	(2) HDMI; supports HDMI/HDCP
Video Resolution Support	Various up to 3840×2160 @60Hz (4:4:4)
Audio Outputs	3.5mm pluggable supports Unbalanced Analog Stereo
Ports	5V Power: (1) Connector; HDMI Input: (8) HDMI Type A Socket; HDMI Output: (2) USB Type B (4), USB Type A (4) Analog Stereo Output: 3.5mm pluggable RS-232: (1) Program Port
Data rate	18 Gbps
Adaptive EDID	Auto
Audio Formats	DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby-AC3/DSD
Deep Color Support	HDR10+, 36-bit per pixel Deep Color, and Dolby Vision
Environmental	Temperature (Operating): 32°F (0°C) to 122°F (50°C)
	Temperature (Storage): -4°F (-20°C) to 140°F (60°C)
	Humidity (Operating): 10% to 90% RH (non-condensing)
	Humidity (Storage): 10% to 90% RH (non-condensing)
	Thermal Dissipation (Typical): 118.7 BTU/hr
Product Dimensions	26.11 x 18.69 x 8.2 cm
Safety	CE, c-UL, UL

SOLVISION TECHNOLOGY

27 Elder Road, Working
Surrey GU24 9HB UK
info@solvisionav.com

9 A, Blackwood Avenue,
Mentone, VIC- 3194
salesaustralia@solvisionav.com

629 Redstone Drive NE, Calgary
AB, T3N, 1KB Alberta
salescanada@solvisionav.com

SOLVISION INDIA

D-9th Floor SAS Tower-B
Sector -38 Gurugram Haryana- 122001
salesindia@solvisionav.com